

# Electro-mechanical crank drive oscillator 10.200 E

special material: stainless steel housing

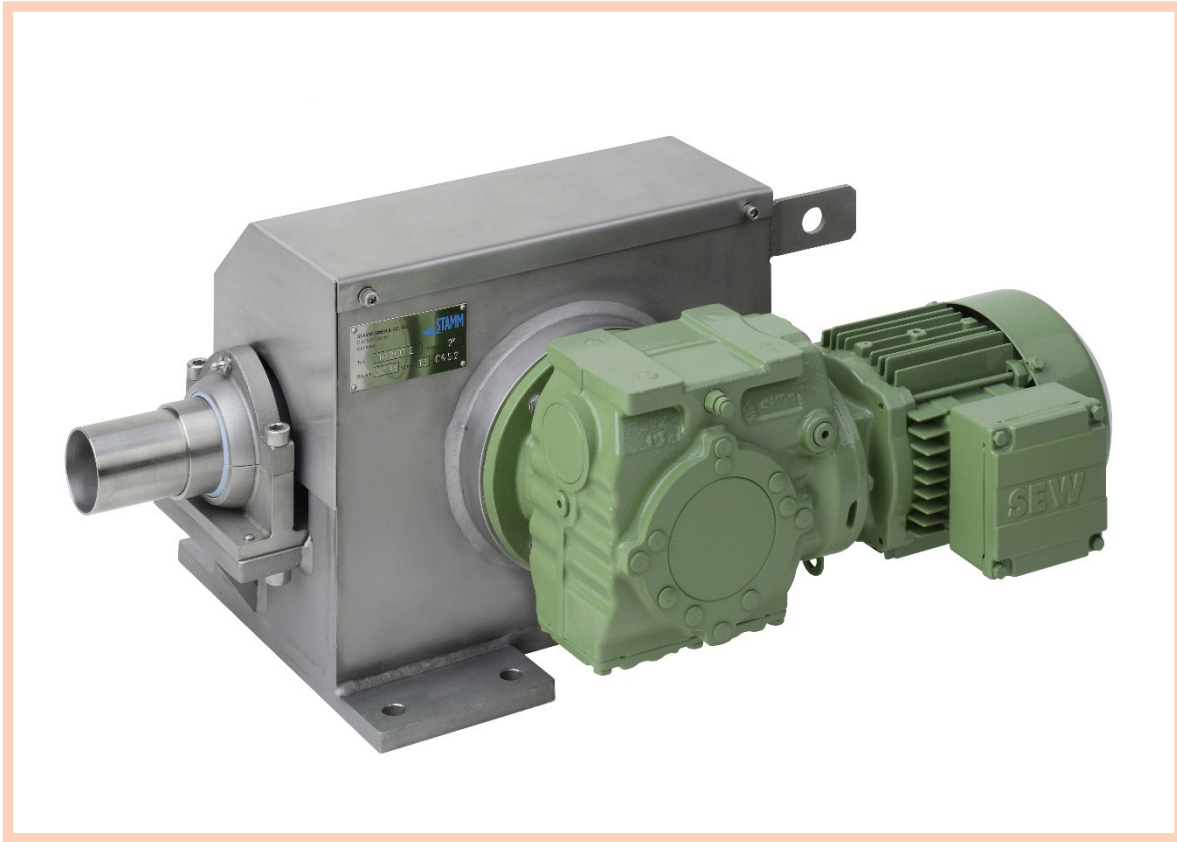


Foto: stainless steel housing

Wire cleaning in stock preparation and waste water treatment  
For oscillation of chemical injection pipes and spray pipes for roll cleaning

### Benefits

- Very robust and reliable
- Little maintenance requirement

### Principle and design

The rotary motion of a worm-gear motor is transferred into an oscillation movement via a crank with sliding block and sliding guide

### Performance Data

- Three-phase worm gear motor  
230/400 V, 50 Hz
- protective system IP 66
- for 2" and 2 1/2" : 0.25 kW  
for 3" and 4" : 0.37 kW
- Special voltage and frequency on request
- Motor without fan on request

### Technical Data

- standard material: steel housing  
special material: stainless steel housing
- Stroke: 200 mm (not adjustable)  
Special strokes on request
- Stroke speed:  
Sinus-shaped curve over the stroke lengths  
with significantly decreasing speed at the reversal points  
(no linear oscillation)

**STAMM GmbH & Co. KG**  
Im Winkel 18  
67547 Worms (Germany)  
Telefon +49 (0) 6241 93133  
Telefax +49 (0) 6241 3225  
contact@stamm-showers.com  
www.stamm-showers.com